

Erratum for IC-2720H


Please note the following correction in the IC-2720H instruction manual page 21, ■ **Audio mute function**, and page 39, ■ **Programming a call channel**.

• **WRONG**

■ **Audio mute function** (page 21)



- Push [FUNC] then [SQL▲ D(MUTE)] to mute audio signals.
 - Both the left and right bands S/Rf meter blink in full-scale condition.
 - Push [CLR A(MW)] (or any other key) to cancel the function.

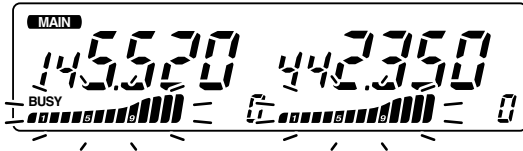

S/Rf meter blinks (full-scale).

■ **Programming a call channel**

(page 39)


Operating frequency, duplex information, subaudible tone information (tone encoder or tone squelch ON/OFF and its frequency) and alphanumeric channel names can also be programmed into the call channel.

• **CORRECT**

■ **Audio mute function** (page 21)



- Push [FUNC] then [SQL▲ D(MUTE)] to mute audio signals.
 - The memory channel number indicator shows the current condition and “Si” indications alternately.
 - Push [CLR A(MW)] (or any other key) to cancel the function.

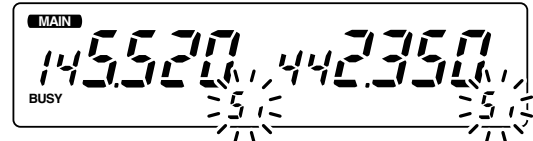

Shows the current condition and “Si” indication alternately.

■ **Programming a call channel**

(page 39)

Operating frequency, duplex information, subaudible tone information (tone encoder or tone squelch ON/OFF and its frequency) can be programmed into the call channel.